



PMD

Genmac provides one-source responsibility for the generating system and accessories.

- All units and components are prototype tested, factory build and production tested. A specific control procedure during the several stages of production ensures long life and reliability.
- Rugged 4 cycle heavy-duty Industrial diesel engine, of primary brands with direct fuel injection system and swirl intake ports combine for a low fuel consumption and excellent transient response.
- Powerful alternators with insulation system of H class and impregnation made with tropicalized epoxy resins, are used as standard.
- Generator set accepts one-step 100% of full load.
- The variation of the Voltage is maintained between +- 1.5% by sophisticated Electronic Voltage Regulators.
- Heavy-duty built-in anti-vibration insulators assures lower noise and longer components life.
- Protection guards on rotating parts
- 4 lifting rings are supplied as standard fixed on the base frame.
- The Silent version consist of a weather-proof bolted modular pre-painted enclosure (2000/14/CE compliant) with hinged lockable doors, radiator coolant hatch, base mounted radiator coolant and engine oil drain lines. These items affords superior flexibility and ease of maintenance.
- A stub-up area is provided to make easier the electrical connection to the load.
- A wide range of accessories is provided on request in order to satisfy the needs of the user and to let the generator work in almost every condition.

RATINGS

Model	Voltage	Phase	Hz	Power Factor	Standby KW	Standby KVA	Standby Amps	Prime KW	Prime KVA	Prime Amps	Starting kVa
G30D	230/400*	3	50	0.8	26	33	48	24	30	43	N/A

(*) Factory default connections

RATING DEFINITION

Standby Rating: Applicable for supplying emergency power for the duration of normal power interruption limited to maximum 500h per year within the following maximum operating time: 100% load 25h per year, 90% load 200h per year.

No overload capability is permitted for this rating. "Limited Time running Power (LTP)" rating conforms to ISO 8528-1.

Prime Rating: Applicable for supplying power at a variable load for an unlimited number of hours per year. A 10% overload capability is available for one hour in twelve hours periods. This rating conforms to ISO 8528-1 "Prime Running Power (PRP)".

STANDARD REFERENCE CONDITIONS:

The above mentioned power data are calculated with: air temeparture of 25°C (77°F); 99kPa of barometric pressure, 100m of altitude a.s.l and 30% of relative humidity. For different conditions please refer to the derating factor's table specific for this engine.

INSTALLATION AND APPLICATION DATA

	Units	50 Hz		60 Hz		
		PRP	LTP	PRP	LTP	
General	Emission certificates	EU2002-88 STAGE2				
	Noise level (silent version)	dB(a) 7mt		66		
	Rated Speed	rpm		1500		
Engine basic data	Engine Brand - Model	Deutz – F4M2011				
	Gross Engine Output	hp (KWm)	36,3 (27,6)	39,4 (29,0)		
	Number and arrangement of cylinders	4 vertical in line				
	Type of air intake	natural				
	Type of cooling	Oil				
	Total displacement	liters (cu. In.)	3,11 (190)			
	Bore x Stroke	mm (in.)	94 (3,7) x 112 (4,4)			
	Speed control	Mechanical				
	Speed drop	+5%				
Fuel system	Type of fuel	Diesel				
	Max delivery head of fuel pump	m	3			
	Fuel consumption @ 25% load	Liters/h (gal/h)	2,1 (0,6)	3,2 (0,8)		
	Fuel consumption @ 50% load	Liters/h (gal/h)	4,1 (1,1)	4,3 (1,1)		
	Fuel consumption @ 75% load	Liters/h (gal/h)	5,5 (1,4)	5,8 (1,5)		
	Fuel consumption @ 100% load	Liters/h (gal/h)	7,2 (1,9)	7,6 (2,0)		
	Standard fuel tank capacity (open)	Liters (gal)				
	Autonomy @75% load (open)	Hours				
	Standard fuel tank capacity (silent)	Liters (gal)	120 (31,7)			
Oil	Autonomy @75% load (silent)	Hours	22			
	Type of oil (for usage at std reference conditions)	SAE 15W40				
	Total Quantity of oil (includin filters)	Liters (gallons)	13 (3,4)			
Air system	Maximum Oil consumption	0,3% of fuel consumption				
	Air filter type	Dry cartridge				
	Max. perm. intake vacuum	mbar	35			
Exhaust system	Combustion air flow	m ³ /min (cf/min)	1,95 (68,8)	1,95 (68,8)		
	Exhaust flow	m ³ /min (cf/min)	5,2 (183,6)	5,5 (194,2)		
	Max. permissible exhaust backpressure	mbar	30			
Electrical system	Outlet size diameter	mm (in.)	48 (1"-1/2)			
	Voltage of electric system	V	12			
	Starter motor capacity	A	258			
Alternator	Type of battery	Lead acid type				
	Number of poles	4				
	Number of bearings	1				
	Excitation	Self excited				
	Type of regulation	Automatic Voltage Regulation				
	Regulator model	SR7/2				
Voltage accuracy	±1,5 % with any power factor and speed variations between -5% +30%					

STANDARD EQUIPMENTS

ENGINE

- Air Cleaner (Dry-cartridge type)
- Fuel Pump
- Fuel Filter
- Fuel stop solenoid
- Thermostat and Housing
- Dry Exhaust Manifold
- Blower Fan & Fan Drive
- Radiator - Unit Mounted
- Electric Starting Motor
- Housing & Flywheel
- Charging Alternator
- Battery Rack & Cables
- First filling of oil and filters
- First filling of coolant

GENERATOR

- Self-ventilated and drip-proof construction
- Synchronous, Brush-less, Self Exciting, Self Regulating
- Direct Coupled With Flex Disk
- 12 Leads winding
- Class H Insulation
- Drip-Proof Construction
- Humidity Tropical Protection
- Radio Interference Suppressor EMC Filter

EXHAUST

- Built-in Residential Muffler (for Silent generators)
- Rain Cap

HANDLING

- Lifting and holding down points

BASE FRAME

- Heavy duty fabricated welded base plate with high quality steel.
- Heavy duty rubber anti-vibration mountings
- Integrated fuel tank with drain plug and fuel sender

ELECTRICAL SYSTEM

- **Battery (for 50Hz is supplied as standard, for 60Hz is to be ordered separately)**
- Battery rack and cables
- Engine driven battery charger
- Battery disconnect switch

CANOPY (for silent units)

- Nylon hinges
- Heavy duty lockable handles in each door
- Large doors for easy access for service and monitoring
- Coolant refilling specific hatch
- Sound foam UL94HF1 compliant
- Modular bolted assembly after painting.
- Grey RAL 7035 "orange peel" specific powder coat paint for outdoor usage
- Weatherproof sealed joints.
- Cut using high precision laser technology.
- Bent using high precision numeric control technology.
- Glazed acoustic sealed control panel door.
- Fuel filler outside enclosure.
- In base oil and coolant drains

CONTROL PANEL (see specific section below)

- AMF controller C-208
- Single phase sensing for voltage and currents
- **Circuit breaker (for 50Hz-230/400V is supplied as standard, for other voltages is to be ordered separately)**
- On/Off button
- Emergency stop button
- External ATS connection board
- EC Conformity in compliance with EN 60439-1


PACKAGING

- Nylon filming protection package
- Alternator, Engine and Generating set operator's manual are supplied together with electrical drawings

PHYSICAL DATA

	Units	PMD G30DSM
Length	mm (in.)	2120 (83,5)
Width	mm (in.)	720 (28,4)
Height	mm (in.)	1150 (45,3)
Weight	Kg (lbs)	650 (1430)

CONTROL PANEL

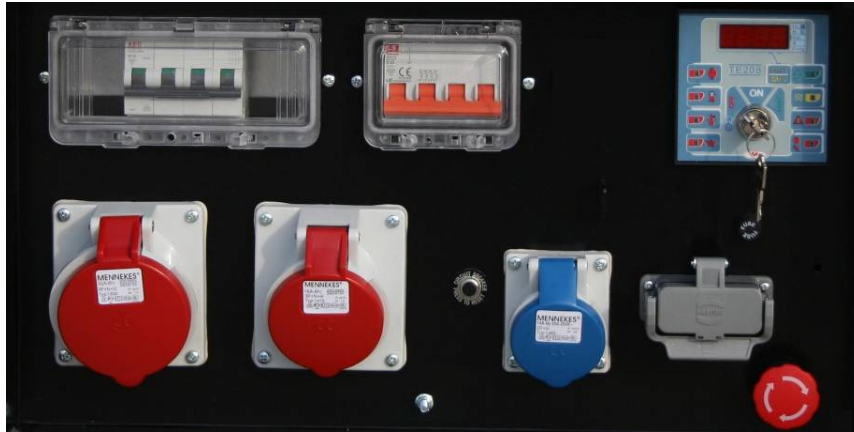

CIRCUIT BREAKER

50Hz – 400V generators are supplied together with a circuit breaker that permits a thermal protection against overloads and magnetic protection against short-circuit.

For **60Hz or 50Hz-230V** versions the circuit breaker has to be ordered separately indicating the voltage at which the generator has to work. All the generator of this line are fully re-connectable according to the specification indicated in the "RATINGS BOOK"

AUXILIARY SOCKETS

A special box with 1 three phase 400V 63A socket and 1 single phase 230V 63A socket and 1 single phase 230V 16A socket is supplied in order to ease the fast connection between the generator and the electrical line or between the generator and the loads.

QUICK CONNECTOR FOR REMOTE START

A 10 pin IP54 female socket is supplied in order to connect easily the generator to an external device for remote start and stop. When not in use the connector is tightly closed with a cap.

COMMANDER C-208

C-208 is controller that includes a sophisticated digital multi-meter, a starting key and an engine protection card with auto-start feature. That can be easily connected to an external ATS with logic.

The main features of the controller are:

- Clear simple and intuitive graphics.
- Quality materials for safe operation and over time life.
- Simple use. Nothing to plan, simply turn the key to start and then everything is managed and controlled by the control unit. A special control avoids attempts to start with the engine already started.
- Simple and direct connection, because the main command relays (start, stop, siren and glow-plus preheating) are already mounted on the unit.
- Checking status of the battery through digital voltmeter.
- Start by signal remote attempts 5 starters, glow-plus pre-heating management and alarm signal in starting failure event. A particular system can start the engine by remote signal with key OFF. This saves to keep the circuit fed unnecessarily to the detriment of battery.

Display Informations

- Vdc – Battery voltage
- H – Counting hours
- Vac – Alternator voltage
- A - Ampère
- F – Frequency (Hz)

Alarms

- Alternator battery charger
- Fuel reserve
- High temperature engine
- Low oil pressure
- Runaway engine speed
- Emergency Stop
- Glow-plugs pre-heating signal
- Engine started signal

OPTIONAL EQUIPMENTS

A wide range of optional equipments are available to satisfy all the needs of the installer. Please contact GenMac's sales department for full details of these and other options

ENGINE

- Starting aids (glow plugs-coolant heaters-oil heaters ..)
- Double-stage filters

GENERATOR

- Thermal protections
- Anti-condensation heaters
- Special treatment for usage in marine environmental conditions
- Full power alternator for single phase connection

EXHAUST

- Exhaust adapters
- Extension exhaust hose
- FAP filters

ELECTRICAL SYSTEM AND CONTROL PANEL

- Auxiliary sockets and plugs
- Fuel level meter
- Oil pressure meter
- Water temperature meter
- Generator Monitoring/Remote control of complete system (with analog, GSM or Ethernet connection)
- Automatic Transfer Switches

HANDLING AND CANOPY

- Central lifting hook
- Slow drive trailers
- On-road Trailers
- Bigger Fuel tanks
- Double wall UL compliant fuel tanks
- Precision fuel sender

MAINTENANCE

- Consumable Filters and spares for each maintenance interval

WARNINGS

- Access to control panel and doors on both sides for inspection and maintenance is required.
- Adequate ventilation on both sides is required.

WARRANTY

Please refer to GenMac's warranty policy described into WG001 module.

All Specifications and Materials are subject to change without prior notice.



GENMAC Group:

Head Quarter

Genmac S.r.l.

42044 Gualtieri, (Reggio Emilia) Italy
via Don Minzoni, 13
Tel. (+39) 0522 828 179
Fax (+39) 0522 829 218

E-mail: info@genmac.it

Web space: www.genmac.it

Subsidiary

Genmac USA, Inc.

7060 NW 52nd STREET
MIAMI - FL 33166 - U.S.A.
Ph. (+1) 305 599 80 99
Fax (+1) 305 599 80 98

Toll Free Dial # 1-877-257-4541

E-mail : genmacusa@genmac-group.com

Web space: www.genmac-group.com

Distributed By: